

SPECIFICATIONS :

Structure

- Utilises Eight Pos Die Cast Grade LM12 Aluminium Alloy Angle Joints
- Complete Knock Down System (FULLY CKD)
- No Welding Require
- Sheet Metal Sections Are Formed Using Thickness 1.5mm Without Sharp Edge
- Assembly Utilises High Quality M8 And M6 Socket Head Cap Screws

Cover And Door


- Sheet Metal Sections Are Formed Using Thickness 1.2mm Without Sharp Edge

Finishing

- Epoxy Powder Coating
- Thickness Coating 50 - 60 Microns
- Semi Matt Texture Finish

Colours

- Dark And Light Grey
- Two Tone

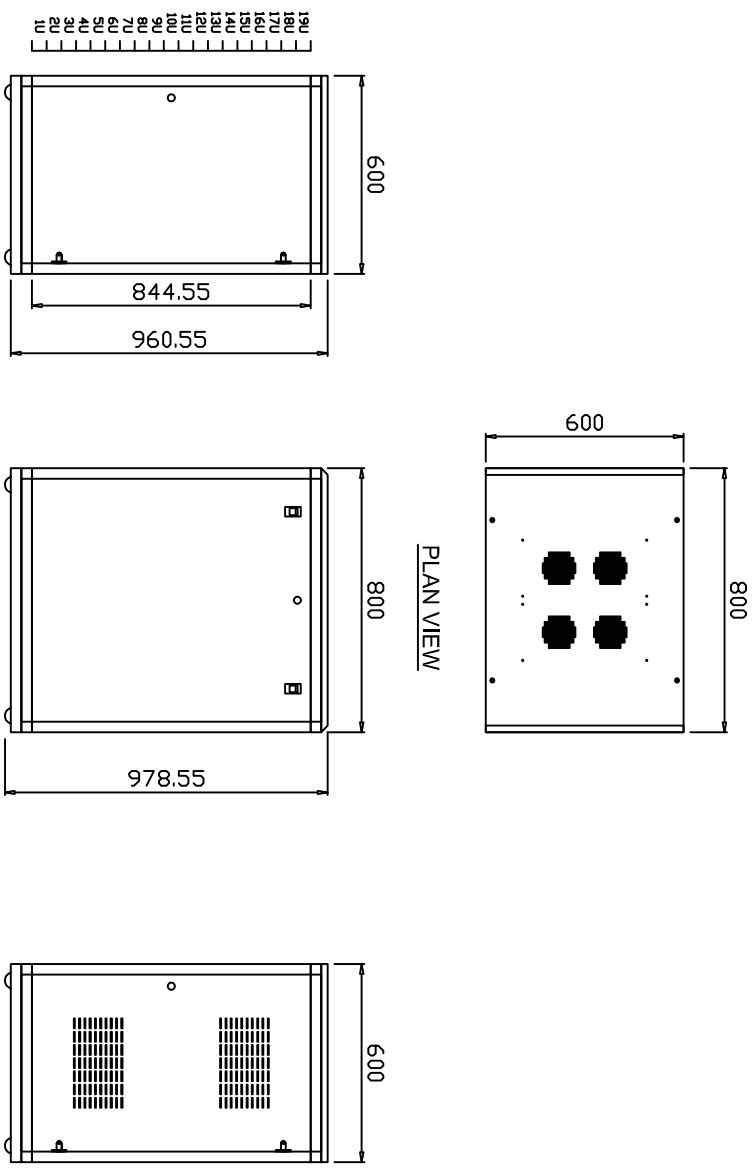

| | | | |
|------------------|---------------------|---|--------------------------|
| BRAND. | TOP RACK | SURFACE PREPARATION | UNIT |
| MODEL. | TRB600/19L O/800/MS | FREE OF OIL & GREASE | MM |
| STANDARD. | 19" MOUNTING | MATERIAL 1.5MM & 1.2MM THK CR SHEET | SCALE N.T.S |
| MADE IN. | MAYASIA | FINISH TEXTURE | REV 0 |
| | | COLOURS DARK & LIGHT GREY | DRAWN ALEX LIM |



YSE INDUSTRIES SDN. BHD.
331879-P
 NO. 14, JLN UTARID US16, SEKSYEN US,
 40150 SHAH ALAM, SELANGOR, MALAYSIA.
 TEL: +603-7847 2292 F.AX: +603-7847 2522
 e-mail: opnuc@ysc.com.my
<http://www.ysc.com.my>