

**SPECIFICATIONS :**

**Structure**

- Utilises Eight Pcs Die Cast Grade LM12 Aluminium Alloy Angle Joints
- Complete Knock Down System (FULLY CKD)
- No Welding Require
- Sheet Metal Sections Are Formed Using Thickness 1.5mm Without Sharp Edge
- Assembly Utilises High Quality M8 And M6 Socket Head Cap Screws

**Cover And Door**


- Sheet Metal Sections Are Formed Using Thickness 1.2mm Without Sharp Edge

**Finishing**


- Epoxy Powder Coating
- Thickness Coating 50 - 60 Microns
- Semi Matt Texture Finish

**Colours**


- Dark And Light Grey
- Two Tone

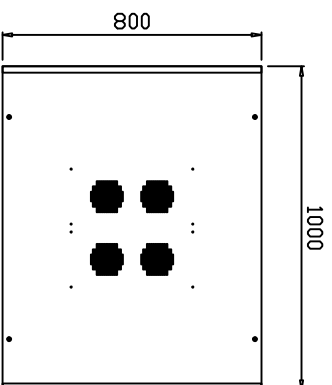


**PLAN VIEW**

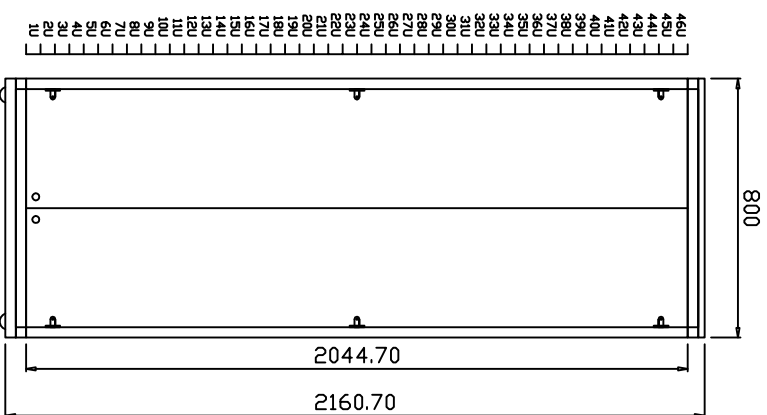

**FRONT VIEW**

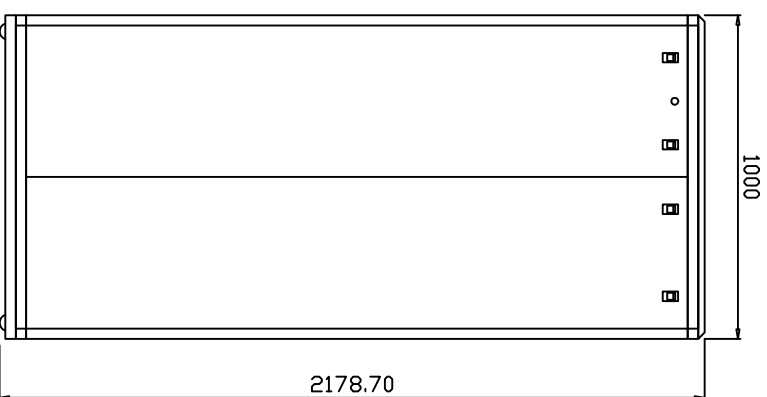

**SIDE VIEW**

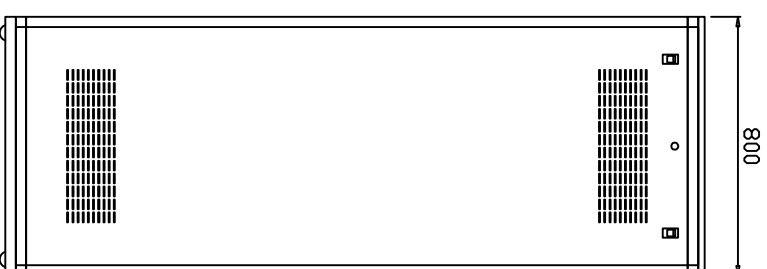

**REAR VIEW**

<b>BRAND.</b>	<b>TOP RACK</b>	SURFACE PREPARATION <b>FREE OF OIL &amp; GREASE</b>		<b>UNIT</b>	<b>MM</b>
<b>MODEL.</b>	TRB800/46LO/1000/MS	<b>MATERIAL</b>	<b>1.5MM &amp; 1.2MM THK CR SHEET</b>	<b>SCALE</b>	<b>N.T.S</b>
<b>STANDARD.</b>	<b>19" MOUNTING</b>	<b>FINISH</b>	<b>TEXTURE</b>	<b>REV</b>	<b>0</b>
<b>MADE IN.</b>	<b>MAYASIA</b>	<b>COLOURS</b>	<b>DARK &amp; LIGHT GREY</b>	<b>DRAWN</b>	<b>ALEX LIM</b>



**YSE INDUSTRIES SDN. BHD.**  
 NO. 14, JLN UTARA 2/16, SEKSYEN US,  
 40150 SHAH ALAM, SELANGOR, MALAYSIA  
 TEL: +603-7847 2292 FAX: +603-7847 2522  
 e-mail: opmck@yse.com.my  
 http://www.yse.com.my