



**SPECIFICATIONS :**


- Structure**
- Utilises Eight Pcs Die Cast Grade LM12 Aluminium Alloy Angle Joints
  - Complete Knock Down System (FULLY CKD)
  - No Welding Require
  - Sheet Metal Sections Are Formed Using Thickness 1.5mm Without Sharp Edge
  - Assembly Utilises High Quality M8 And M6 Socket Head Cap Screws
- Cover And Door**
- Sheet Metal Sections Are Formed Using Thickness 1.2mm Without Sharp Edge
- Finishing**
- Epoxy Powder Coating
  - Thickness Coating 50 - 60 Microns
  - Semi Matt Texture Finish
- Colours**
- Dark And Light Grey
  - Two Tone

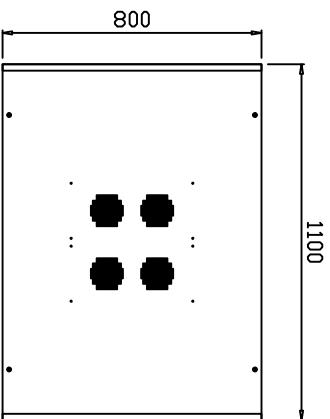


**PLAN VIEW**

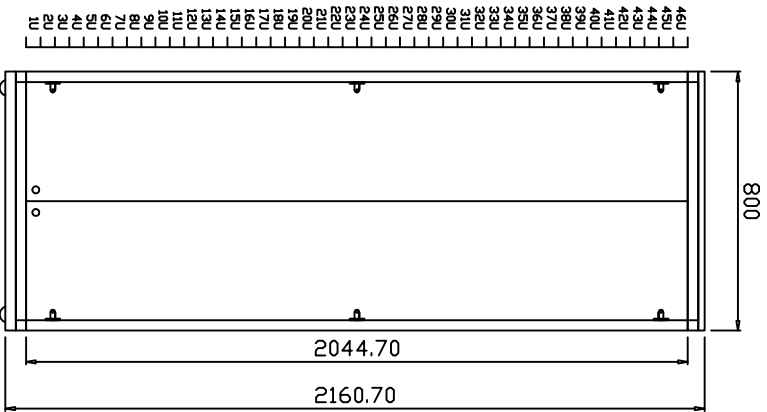

**FRONT VIEW**

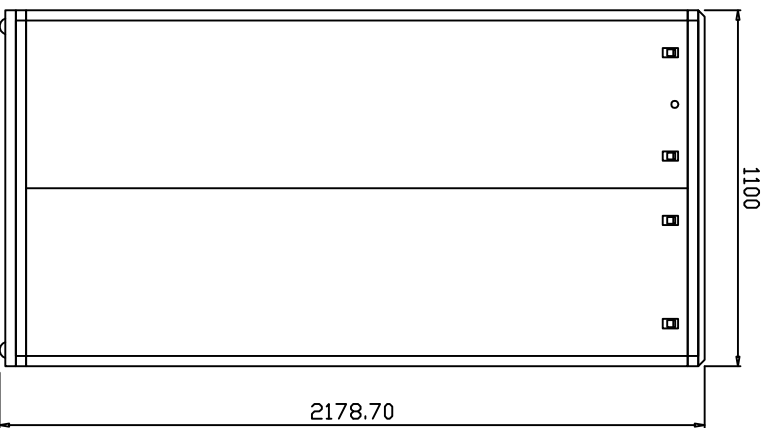

**SIDE VIEW**

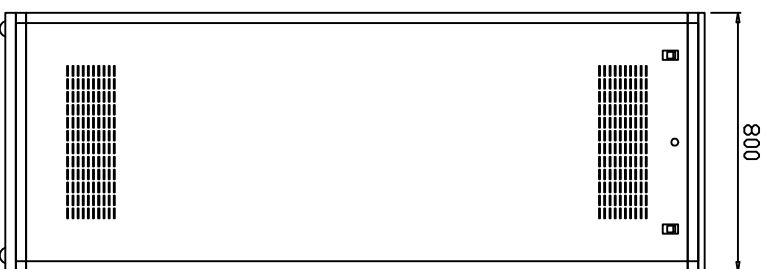

**REAR VIEW**

<b>BRAND.</b>	<b>TOP RACK</b>	SURFACE PREPARATION <b>FREE OF OIL &amp; GREASE</b>		<b>UNIT</b>
<b>MODEL.</b>	TRB800/46LO/1100/MS	<b>MATERIAL</b>	<b>1.5MM &amp; 1.2MM THK CR SHEET</b>	<b>MM</b>
<b>STANDARD.</b>	19" MOUNTING	<b>FINISH</b>	<b>TEXTURE</b>	<b>SCALE</b>
<b>MADE IN.</b>	MAYASIA	<b>COLOURS</b>	<b>DARK &amp; LIGHT GREY</b>	<b>REV</b>
				<b>0</b>
				<b>DRAWN</b>
				<b>ALEX LIM</b>



**YSE INDUSTRIES SDN. BHD.**  
 NO. 14, JLN UTARA DUS/16, SEKSYEN US,  
 40150 SHAH ALAM, SELANGOR, MALAYSIA  
 TEL: +603-7847 2292 FAX: +603-7847 2522  
 e-mail: [opnck@yse.com.my](mailto:opnck@yse.com.my)  
<http://www.yse.com.my>