

SPECIFICATIONS :

Structure

- Utilises Eight Pos Die Cast Grade LM12 Aluminium Alloy Angle Joints
- Complete Knock Down System (FULLY CKD)
- No Welding Require
- Sheet Metal Sections Are Formed Using Thickness 1.5mm Without Sharp Edge
- Assembly Utilises High Quality M8 And M6 Socket Head Cap Screws

Cover And Door


- Sheet Metal Sections Are Formed Using Thickness 1.2mm Without Sharp Edge

Finishing


- Epoxy Powder Coating
- Thickness Coating 50 - 60 Microns
- Semi Matt Texture Finish

Colours

- Dark And Light Grey
- Two Tone

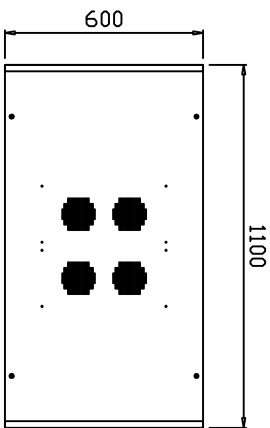


PLAN VIEW

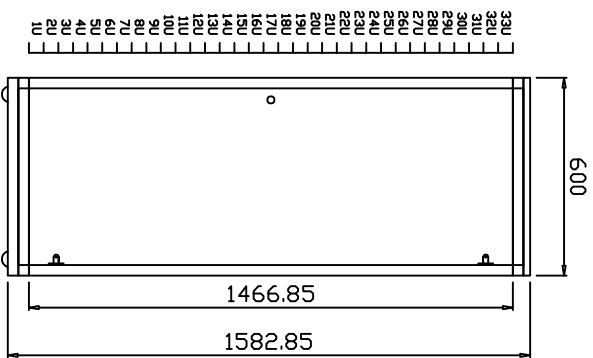

FRONT VIEW



SIDE VIEW

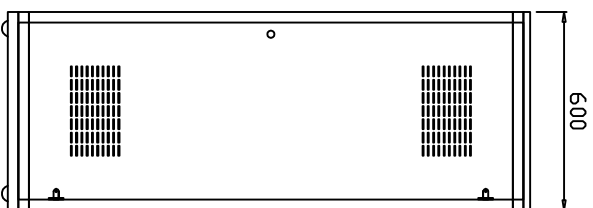

REAR VIEW

BRAND.	TOP RACK	SURFACE PREPARATION	UNIT
MODEL.	TRB600/33LO/1100/MS	FREE OF OIL & GREASE	MM
STANDARD.	19" MOUNTING	MATERIAL	SCALE
MADE IN.	MAYASIA	1.5MM & 1.2MM THK CR SHEET	N.T.S
		FINISH	REV
		TEXTURE	0
		COLOURS	DRAWN
		DARK & LIGHT GREY	ALEX LIM



YSE INDUSTRIES SDN. BHD.
330879-P
 NO. 14, JLN UTARA DUSUN 16, SEKSYEN US,
 40150 SHAH ALAM, SELANGOR, MALAYSIA.
 TEL: +603-7847 2292 F.AX: +603-7847 2522
 e-mail: opnuc@ysc.com.my
<http://www.ysc.com.my>