


SPECIFICATIONS :


- Structure**
- Utilises Eight Pos Die Cast Grade LM12 Aluminium Alloy Angle Joints
 - Complete Knock Down System (FULLY CKD)
 - No Welding Require
 - Sheet Metal Sections Are Formed Using Thickness 1.5mm Without Sharp Edge
 - Assembly Utilises High Quality M8 And M6 Socket Head Cap Screws
- Cover And Door**
- Sheet Metal Sections Are Formed Using Thickness 1.2mm Without Sharp Edge

- Finishing**
- Epoxy Powder Coating
 - Thickness Coating 50 - 60 Microns
 - Semi Matt Texture Finish


- Colours**
- Dark And Light Grey
 - Two Tone

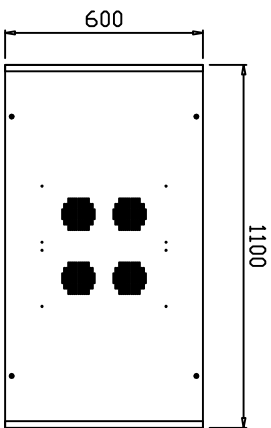


PLAN VIEW

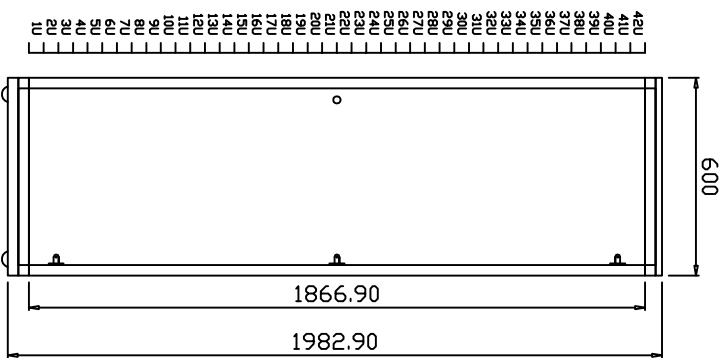

FRONT VIEW

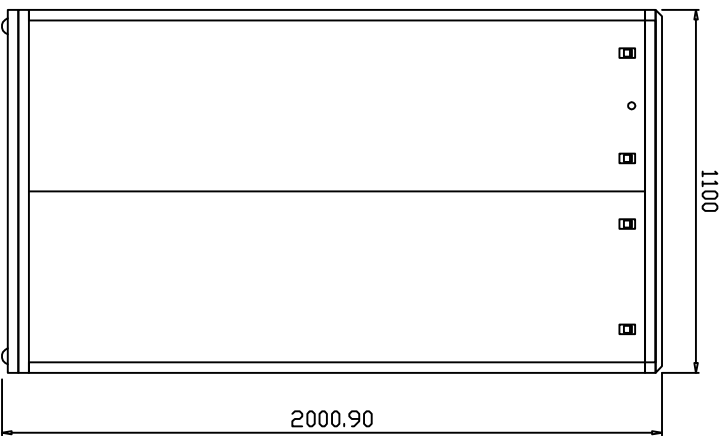

SIDE VIEW

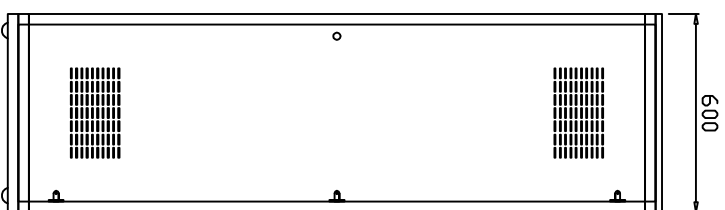

REAR VIEW

BRAND.	TOP RACK	SURFACE PREPARATION	FREE OF OIL & GREASE	UNIT	MM
MODEL.	TRB600/42LO/1100/MS	MATERIAL	1.5MM & 1.2MM THK CR SHEET	SCALE	N.T.S
STANDARD.	19" MOUNTING	FINISH	TEXTURE	REV	0
MADE IN.	MAYASIA	COLOURS	DARK & LIGHT GREY	DRAWN	ALEX LIM



YSE INDUSTRIES SDN. BHD.
330879-P
 NO. 14, JLN UTARID US16, SEKSYEN US,
 40150 SHAH ALAM, SELANGOR, MALAYSIA.
 TEL: +603-7847 2292 F.AX: +603-7847 2522
 e-mail: opnuc@yse.com.my
<http://www.yse.com.my>