

SPECIFICATIONS :

Structure

- Utilises Eight Pos Die Cast Grade LM12 Aluminium Alloy Angle Joints
- Complete Knock Down System (FULLY CKD)
- No Welding Require
- Sheet Metal Sections Are Formed Using Thickness 1.5mm
- Without Sharp Edge
- Assembly Utilises High Quality M8 And M6 Socket Head Cap Screws

Cover And Door


- Sheet Metal Sections Are Formed Using Thickness 1.2mm
- Without Sharp Edge

Finishing


- Epoxy Powder Coating
- Thickness Coating 50 - 60 Microns
- Semi Matt Texture Finish

Colours


- Dark And Light Grey
- Two Tone




PLAN VIEW

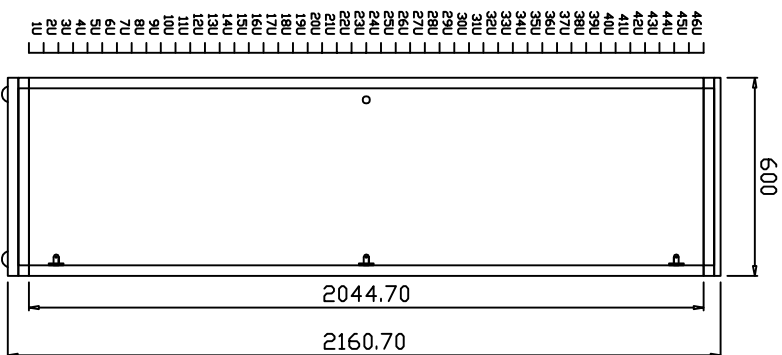

FRONT VIEW

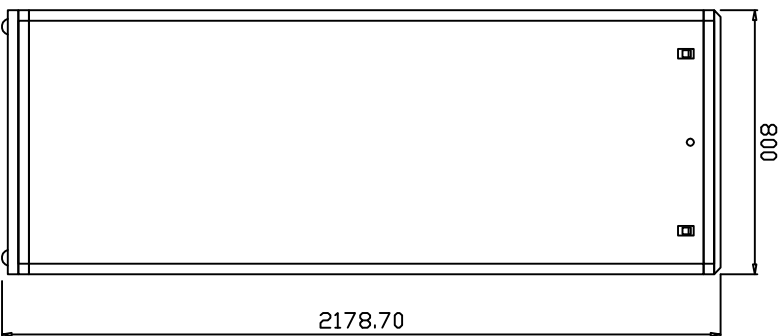

SIDE VIEW

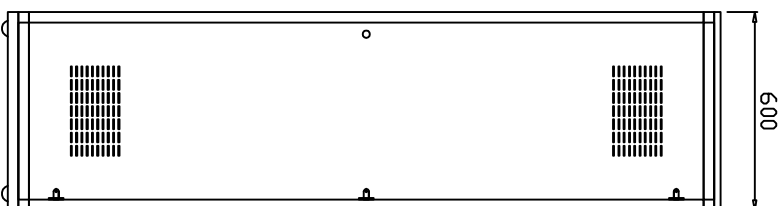

REAR VIEW

BRAND.	TOP RACK	SURFACE PREPARATION	FREE OF OIL & GREASE	UNIT	MM
MODEL.	TRB600/46L O/800/MS	MATERIAL	1.5MM & 1.2MM THK CR SHEET	SCALE	N.T.S
STANDARD.	19" MOUNTING	FINISH	TEXTURE	REV	0
MADE IN.	MAYASIA	COLOURS	DARK & LIGHT GREY	DRAWN	ALEX LIM



YSE INDUSTRIES SDN. BHD.
330879-P
 NO. 14, JLN ETARID US16, SEKSYEN US,
 40150 SHAH ALAM, SELANGOR, MALAYSIA.
 TEL: +603-7847 2292 F.AX: +603-7847 2522
 e-mail: opnrc@yse.com.my
<http://www.yse.com.my>